




## INSTALLATION INSTRUCTIONS FOR PSG-5088 COVER PLATE

1. Remove the gun from the system and remove the hose fittings from the back.
2. Remove the (4) #27 Phillips Screws
3. Remove the #3 Cover Plate Note: It may be glued to the front, so you might have to pry it off.
4. Clean the face of the gun of any contamination or gelled resin.
5. Place the new #3 Cover Plate on the gun and be sure to orient it correctly.
6. Place the gun in a vice so that the cover plate is pressed firmly onto the face of the gun.
7. Using a 6-32 Tap, place the tap through upper and lower holes in the #3 Cover Plate and chase the existing threads for the (4) #27 Phillips Screws. Note: The holes in the Cover Plate are slightly offset in order to keep it tight. If you skip this step you will damage the threads on both the new #27 Phillips Screws and in the body of the gun.
8. Screw the (4) #27 Phillips Screws into their respective hole, but do not overtighten, they will break off.
9. Place (2) new #33 O-Rings onto the face of the gun.
10. Replace the hose fittings in the back of the gun and place the gun back on the system.

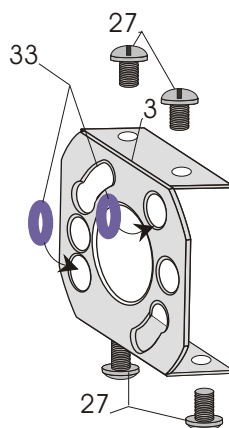

12553 66th St. North  
Largo, FL 33773  
727-536-0868 FAX 536-0067